



MHTL-CUBE-G

LED LINEAR RECESSED GRID SERIES

FEATURES

- Full Even Illumination Across Diffuser - No Light Leak
- Designed for Recessed Grid Ceiling
- Removable Lens to Access LED PCB and Driver
- 1/2" Knock-out Hole on Top for Incoming Power Source
- 5/16" Threaded Holes on Top for Additional Cable Support
- Optional Emergency Battery Backup
- Optional Motion Sensor


GENERAL INFORMATION

| | |
|----------------|--|
| Applications | Corporate Campus / Data Center / Education / Healthcare / Retail |
| Warranty | 10-Year Warranty |
| Construction | Matte White Extruded Aluminum Housing Advanced Optical Film to Optimize Efficiency Frosted PC Diffuser to Reduce Glare |
| Certifications | |

PRODUCT DATA

| | |
|-------------------------|------------------|
| Universal Input Voltage | 120-277V |
| Optional Input Voltage | N/A |
| Power Factor | > 0.95 @ 277V |
| Mounting | Recessed Grid |
| Lumens | Up to 1,000/ft |
| Max Input Power | Remove this line |
| CRI | > 83 |
| CCT | 2700K to 5700K |
| L70 | > 100,000 Hours |
| Rated Lifespan | > 150,000 Hours |
| THD | < 10% @ 277V |

DIMENSIONS

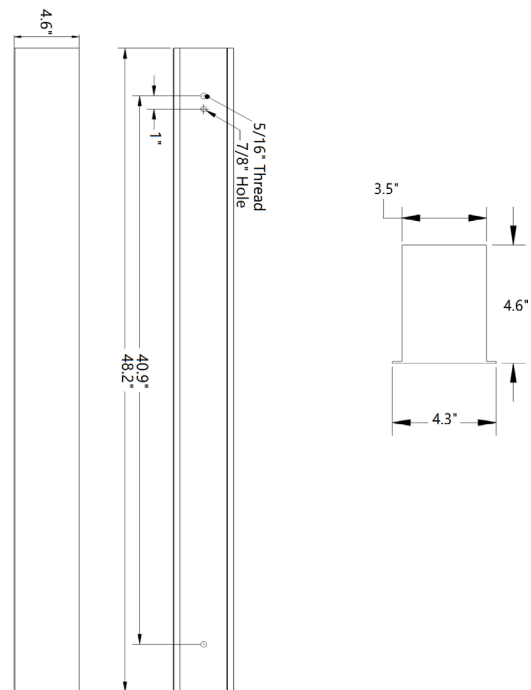

FIXTURE PERFORMANCE

| Model | Size/CCT/CRI | Direct Light (lm/ft) | Dimensions |
|-----------------|--------------|----------------------|---------------------|
| MHTL-CUBE-G-4FT | 4FT/3500K/83 | 600/700/800/1000 | 48.2" x 4.3" x 4.6" |
| MHTL-CUBE-G-6FT | 6FT/3500K/83 | 600/700/800/1000 | 72.2" x 4.3" x 4.6" |
| MHTL-CUBE-G-8FT | 8FT/3500K/83 | 600/700/800/1000 | 96.2" x 4.3" x 4.6" |

ORDERING INFO: Sample Code - MHTL-CUBE-G

| Series | Size | Direct Light | Color Temperature | Options |
|-------------|----------------------------------|---|--|---|
| MHTL-CUBE-G | | | | |
| MHTL-CUBE-G | 4FT 6FT 8FT Custom Size | 600 lm/ft 700 lm/ft 800 lm/ft 1000 lm/ft | 3K=3000K 35K=3500K 4K=4000K 5K=5000K AT=2700K to 5700K | EB=Emergency Battery Backup OS=Motion Sensor |