



MHTL-LHB-ECO

LED LINEAR HIGH BAY SERIES

FEATURES

- Accessible Driver and Wiring Compartment on Top
- Wide Spread 115° X 105° Distribution
- Available Motion Sensor for Additional Energy Savings

GENERAL INFORMATION

Applications	Gymnasium · Hangers · Manufacturing · Warehouse
Warranty	10-year Warranty
Construction	Combination of Aluminum and Steel Housing (White) Standard Frosted Prismatic Polycarbonate Lens


Certifications



PRODUCT DATA

Universal Input Voltage	120 - 277V
Optional Input Voltage	???
Power Factor	> 0.90 @277V
Mounting	Standard V Hook and 3ft Chain Mount - Optional Pendant Mount
Lumens	42,000
Max Input Power	320W
CRI	> 80 or Optional 90 CRI
CCT	4000K/5000K
L70	> 100,000 Hours
Rated Lifespan	> 100,000 Hours
THD	< 20% @277V

DIMENSIONS

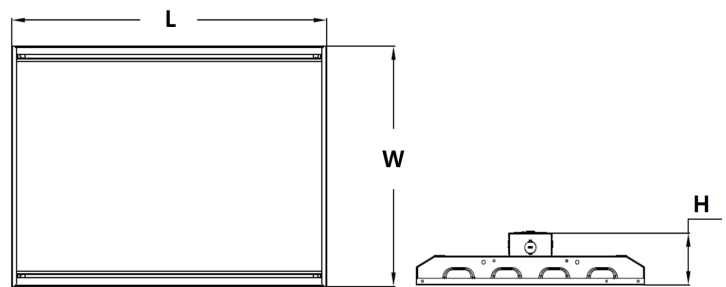

inch (mm)

Model	L	W	H
110W	24.6 (625)	12.6 (320)	3.6 (92)
160W	24.6 (625)	17.3 (440)	3.6 (92)
220W	47.2 (1200)	12.6 (320)	3.6 (92)
320W	47.2 (1200)	17.3 (440)	3.6 (92)

FIXTURE PERFORMANCE

Model	Input Power	Lm/W	Lumen	Dimensions
MHTL-LHB-ECO-110E-4K-U	110W	130	14,500	24.6" x 12.6" x 3.6"
MHTL-LHB-ECO-160E-4K-U	160W	130	21,000	24.6" x 17.3" x 3.6"
MHTL-LHB-ECO-220E-4K-U	220W	130	29,000	47.2" x 12.6" x 3.6"
MHTL-LHB-ECO-320E-4K-U	320W	130	42,000	47.2" x 17.3" x 3.6"

ORDERING INFO: Sample Code - MHTL-LHB-ECO-110E-4K-U-PM-OS

Series	Wattage	Color Temperature	Input Voltage	Mounting	Options
MHTL-LHB-ECO	E				
MHTL-LHB-ECO	110 160 220 320	4K=4000K 5K=5000K	U=120-277V 347=347V 480=480V	PM=Pendant Mount CM=Chain Mount (Standard 3ft.)	(Blank) - Standard in White 90CRI=90 CRI CP=Cord & Plug (Specify Cord & Plug) OS=Occupancy Sensor (Specify ON/OFF or Dimming)