



MHTL-LHB-PRM

LED LINEAR HIGH BAY SERIES

FEATURES

- Easy Access on Top for Driver and Wiring
- 120° Wide Distribution
- V-hook and 6ft Chain Included
- Available Motion Sensor - Attached in the Field
- Operating Frequency 50Hz/60Hz


GENERAL INFORMATION

Applications	Gymnasium · Hanger · Manufacturing · Warehouse
Warranty	10-year Warranty
Construction	Die-form Steel housing (White) Frosted Polycarbonate Lens
Certifications	   

PRODUCT DATA

Universal Input Voltage	120 - 277V
Optional Input Voltage	???
Power Factor	> 0.90 @277V
Mounting	???
Lumens	42,000
Max Input Power	300W
CRI	> 80
CCT	4000K/5000K
L70	> 100,000 Hours
Rated Lifespan	> 100,000 Hours
THD	< 15% @277V

DIMENSIONS

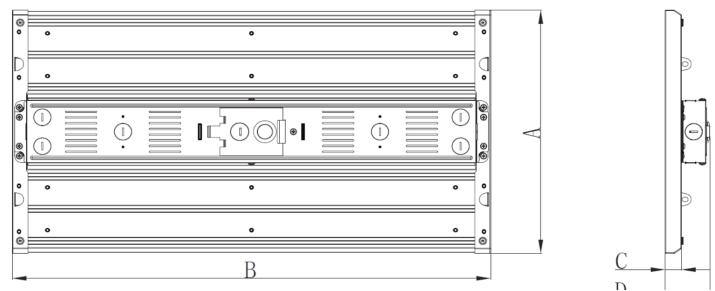

V-Hook and Chain are Included

Model	A	B	C	D
100W	12.60"	23.82"	0.83"	2.20"
150W	17.32"	23.82"	0.83"	2.20"
200W / 240W	12.60"	45.87"	0.83"	2.20"
300W	17.32"	45.87"	0.83"	2.20"

FIXTURE PERFORMANCE

Model	Input Power	Lm/W	Lumen	Dimensions
MHTL-LHB-PRM-100E-5K	100W	>130	14,000	23.82" x 12.6" x 2.2"
MHTL-LHB-PRM-150E-5K	150W	>130	21,000	23.82" x 17.32" x 2.2"
MHTL-LHB-PRM-200E-5K	200W	>130	26,000	45.87" x 12.6" x 2.2"
MHTL-LHB-PRM-240E-5K	240W	>130	26,000	45.87" x 12.6" x 2.2"
MHTL-LHB-PRM-300E-5K	300W	>130	26,000	45.87" x 17.32" x 2.2"

ORDERING INFO: Sample Code - MHTL-HB-PRM-100-4K-U-CP

Series	Wattage	Color Temperature	Input Voltage	Options
MHTL-HB-PRM				
MHTL-HB-PRM	100 150 200 240 300	4K=4000K 5K=5000K	U=120-277V 347=347V 480=480V	(Blank) - Standard in White CP=Cord & Plug (Specify Cord & Plug) OS-On/Off=On/Off Occupancy Sensor OS-Dim=Dimming Occupancy Sensor