




mhtlighting

illuminating PoE technology



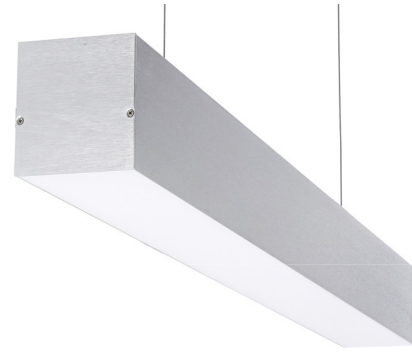

MHTL-CUBE-4FT

LED LINEAR SUSPENDED SERIES

FEATURES

- Full Even Illumination Across the Diffuser
- No Light Leaks at All Visible Joints
- Standard 3ft. Aircraft Cable For Suspended Mount
- 4kV Surge Protection



GENERAL INFORMATION

Applications	Data Center / Display Room / Hospitals / Office / School
Warranty	10-Year Warranty
Construction	6063 Extruded Aluminum Housing - White Finish Advanced Optical Film to Optimize Efficiency Frosted White PC Diffuser to Reduce Glare
Certifications	  

PRODUCT DATA

Universal Input Voltage	120 - 277V
Power Factor	> 0.95 @277V
Mounting	Optional Ceiling or Wall Surface Mount
Lumens	4,000 Lumens
Max Input Power	35W
CRI	> 83 or Optional 90 CRI
CCT	3500K/4000K/5000K
L70	> 100,000 Hours
Rated Lifespan	> 150,000 Hours
THD	< 20% @ 277V

DIMENSIONS

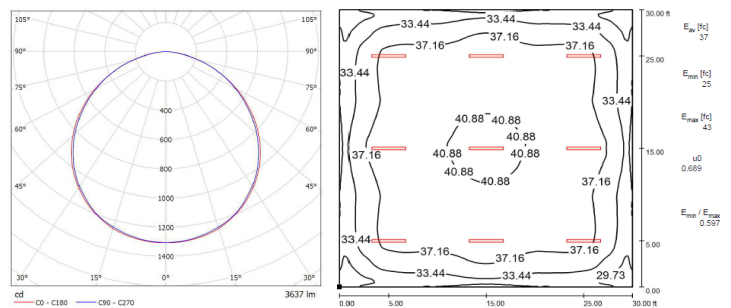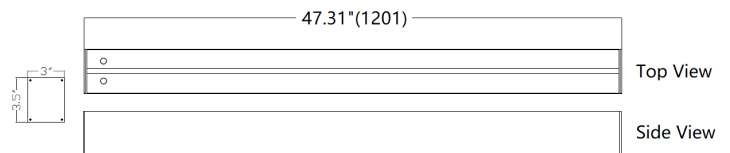

FIXTURE PERFORMANCE

Model	Input Power	Color Temp	Lumens	Dimensions
MHTL-CUBE-4FT-35E-35K-U	35W	3500K	4,000	47.31" x 3" x 3.5"

ORDERING INFO: Sample Code - MHTL-CUBE-4FT-35E-U-WM-CK

Series	Color Temperatures	Input Voltage	Mounting	Options
MHTL-CUBE-4FT-35E		U		
MHTL-CUBE-4FT-35E	35K=3500K 4K=4000K 5K=5000K	U=120-277V	WM=Wall Surface Mount (Specify Hole Location for Wires) SM=Ceiling Surface Mount AC=Aircraft Cable (Standard 3ft. Long)	(Blank) - (Custom Color Available. Standard in White Finish) EB=Emergency Backup 90CRI=90 CRI CK=White Canopy Kit (Set of Two)