





## MHTL-SMTR

### LED SURFACE MOUNT TROFFER SERIES

#### FEATURES

- Highly Reflective White Coating to Maximize Efficiency
- 1/2" Knock-outs on Top
- Standard 4kV Surge Protection - Optional 20kV
- 0-10V Dimmable Driver



#### GENERAL INFORMATION

Applications	Conference/Meeting Room / Commerical Building / Healthcare / Office and School
Warranty	10-Year Warranty
Construction	0.8mm Die-form Steel Housing (White) Frosted Prismatic Acrylic Lens - Low Glare & Even Light Hinged Doorframe For Easy Installation and Maintenance
Certifications	   

#### PRODUCT DATA

Universal Input Voltage	120 - 277V
Optional Input Voltage	347V/480V
Power Factor	> 0.90 @277V
Mounting	Standard Ceiling Surface Mount
Lumens	5000K
Max Input Power	480W
CRI	> 80 - Optional 90 CRI
CCT	3500K/4000K/5000K
L70	> 100,000 Hours
Rated Lifespan	> 100,000 Hours
THD	< 20% @277V

#### DIMENSIONS

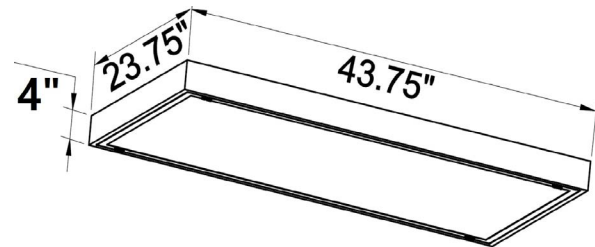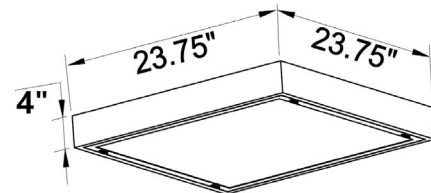

#### FIXTURE PERFORMANCE

Model	Input Power	Lm/W	Lumen	Dimensions
MHTL-SMTR-2X2-40E-35K-U	40W	120	4,800	23.75" x 23.75" x 4"
MHTL-SMTR-2X4-50E-35K-U	50W	125	6,200	23.75" x 47.75" x 4"
MHTL-SMTR-2X4-60E-35K-U	60W	125	7,500	23.75" x 47.75" x 4"

#### ORDERING INFO: Sample Code - MHTL-SMTR-2X2-40E-35K-U

Series	Wattage	Color Temperature	Input Voltage	Options
MHTL-SMTR				
MHTL-SMTR	2X2-40E 2X4-50E 2X4-60E	35K=3500K 4K=4000K 5K=5000K	U=120-277V 347=347V 480=480V	(Blank) - Standard in White SPD=20kV Surge Protective Device 90CRI=90 CRI EM=Emergency Battery Backup