


PHOTOMETRICS:

MHTi-CUBE-L-SC-8FT-800-400-4K

Luminaire Output: 800 Lumens Per Foot Direct / 400 Lumens Per Foot Indirect

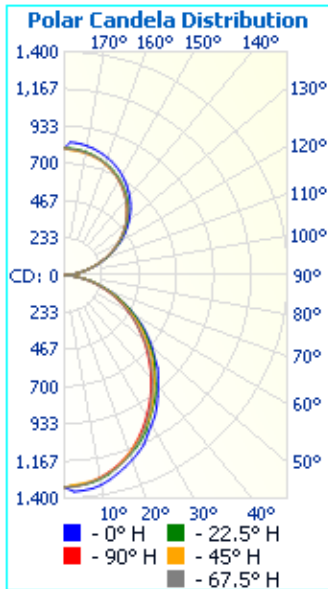

	Center Beam fc	Beam Width	
1.5ft	593 fc	3.8 ft	3.4 ft
3.0ft	148 fc	7.7 ft	6.8 ft
4.5ft	65.9 fc	11.5 ft	10.2 ft
6.0ft	37.1 fc	15.4 ft	13.6 ft
7.5ft	23.7 fc	19.2 ft	17.0 ft
9.0ft	16.5 fc	23.1 ft	20.4 ft

■ Vert. Spread: 104.1°
■ Horiz. Spread: 97.2°

SPECIFICATIONS

Housing: Matte White Extruded Aluminum Housing Designed for Suspended Continuous Row Installations with Direct and Indirect Lighting Configurations

Lens: White Polycarbonate (Optional Louver Add-on - Glare Free)

Reflector: Aluminum Mirror Reflector to Optimize Efficiency and Emitting Full and Even Illumination. No Light Leaks at All Visible Joints.

Electrical: Integrated PoE Low Voltage Driver Node. Optional Integrated Emergency Battery Backup and Motion Sensor.

Warranty: 10-Year Warranty

Direct Lumen Output:
500 - 1,000 Lumens Per Foot

Indirect Lumen Output:
300 - 500 Lumens Per Foot

CRI: >85

CCT: 3000K/3500K /4000K/5000K/
Tunable (2700K to 5700K)

L70: >60,000 Hours

Rated Lifespan: >100,000 Hours

Dimensions:
Standard in 4-Foot or 8-Foot Housing Lengths (Custom Lengths Available)

4FT: 48.2" x 3.5" x 4.6"
6FT: 72.2" x 3.5" x 4.6"
8FT: 96.2" x 3.5" x 4.6"



- All Products are ETL Listed and Assembled in ISO9000/1 Certified US Facility
- Fixtures carry a limited 10-year Warranty (See Warranty Terms and Conditions)
- Every Product is Quality Tested and Inspected Prior to Shipment
- Proudly Manufactured in the USA

inspeXtor Plant Operations

1961 Richmond Terrace
Staten Island, New York 10302
Tel: (718) 524-4370
Fax: (718) 524-4390

West Coast Operations

2285 Michael Faraday Drive
Suite 10
San Diego, California 92154
Tel: (619) 661-0600

www.inspeXtor.com

888-511-7780

Rev Date: June 2019