

# PARKING GARAGE RVLT-PV-HB SERIES

Project \_\_\_\_\_

Part Number \_\_\_\_\_

Quantity \_\_\_\_\_




## APPLICATIONS

- Canopies
- Corridors
- Downlight Applications
- Entrances
- Parking Structures
- Stairwells
- Tunnels
- Transit Stations

## FEATURES & SPEC

- 10-year Warranty; 100,000-hour Rated Life
- Heavy Duty Aluminum Die Cast with Hinged Frame
- Powder Coated in White Finish In and Out
- Low-glare Light Diffusing Prismatic Acrylic Drop Lens
- Excellent Thermal Management
- >140° Beam Angle
- Available Emergency Backup and Occupancy Sensor
- Surface Mount or 3/4" Pendant Mount
- 0-10V Dimming Driver
- Universal 110 - 277V Input Voltage
- Power Factor > 0.92 @277V; THD < 9% @277V
- CCT 4000K or 5000K; CRI > 83

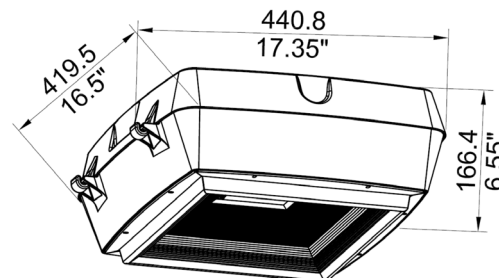

Model	Input Power	Lm/W	Lumen	Color Temperature
RVLT-PV-HB-45-4K-U	45W	122	5,400	4000K
RVLT-PV-HB-65-4K-U	65W	124	8,000	4000K
RVLT-PV-HB-100-4K-U	100W	120	12,000	4000K

## ORDERING CODES

RVLT-PV-HB	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	<u>Wattage:</u> 45, 65, 100	<u>Color Temp:</u> 4K=4000K 5K=5000K	<u>Input Voltage:</u> U=120-277V	<u>Mounting:</u> PM=Pendant SM=Surface	<u>Option:</u> (Standard Sensor Time Delay 5 Minutes) OS-On/Off=On/Off Only Motion Sensor OS-Dim=Dimming Only Motion Sensor (50% Default) EB=Emergency Battery Backup SPD=Surge Protective Device LC=Lutron Control (Limelight)

- Products are Assembled in ISO9000/1 Certified US Facility
- 10-year Warranty (See Warranty Terms and Conditions)
- Every Product is Quality Tested and Inspected Prior to Shipment
- Proudly Manufactured in the USA
- For Product IES Files Please Contact Your Local Reps



333-511-7730

[www.mhtlighting.com](http://www.mhtlighting.com)